


COAXIAL SURGE PROTECTOR DEVICE, Slim Line GDT technology

3406.26.0010

Properties

- Slim in-line design
- Broadband operation from DC up to 2 GHz
- DC continuity for remote powering
- Permanently installed gas discharge tube
- Compliant to IEC 61643-21

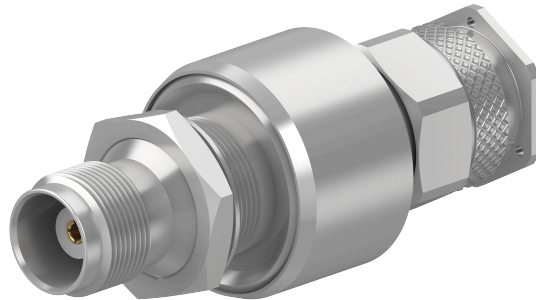

Product configuration	
Main path connectors	Port 1: unprotected, TNC plug (male) Port 2: protected, TNC jack (female)
Mounting and grounding	MH4 (bulkhead mounting)
Side of bulkhead	protected side
Inline design	YES
EMP can be install reversed	YES

Interface and material data	
Housing material / plating	Brass / SUCOPLATE (R) Plating
Center contact, material / plating	Port 1: Copper Beryllium Alloy / Gold Plating (without Nickel underplating)
	Port 2: Copper Beryllium Alloy / Gold Plating (without Nickel underplating)

Electrical data	
Impedance	50 Ω
Frequency frame	0 MHz to 2000 MHz
Return loss typical	≥ 20 dB
Insertion loss typical	≤ 0.2 dB
CW power frame	≤ 80 W
Static spark voltage	230 V, +/- 25 % (@ 100 V/s)
Residual pulse energy (typ.)	350 μ J (test pulse 4 kV 1.2/50 μ s; 2 kA 8/20 μ s)
Surge current handling capability	10 kA single, 5 kA multiple (test pulse 8/20 μ s)

Electrical remarks	
Gas tube	Yes DC, GDT included, not replaceable

COAXIAL SURGE PROTECTOR DEVICE, Slim Line GDT technology

3406.26.0010

Mechanical data	
Weight	50 g

Environmental data	
Operation temperature	-40 °C ... 85 °C
Storage temperature	-40 °C ... 85 °C
Ingress protection (IP Rating)	Mated / IP65, according to IEC 60529
Thermal shock according	MIL-STD-202, Method 107, Cond. B
Vibration according	MIL-STD-202, Method 204, Cond. D
Moisture resistance according	MIL-STD-202, Method 106

Compliance			
Item number	Directive / Regulation	Rating	Exemptions / Details
84045259	RoHS 2011/65/EU and (EU) 2015/863	Compliant with exemption	6c
	REACH 1907/2006 Article 33 SVHC	Contains one or more SVHC >0,1%	CAS: 7439-92-1 Lead

Ordering Information Table	
Item number	Item description
84045259	3406.26.0010

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/ EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P1968 / Date of publication: 28.02.2025 / uncontrolled copy