
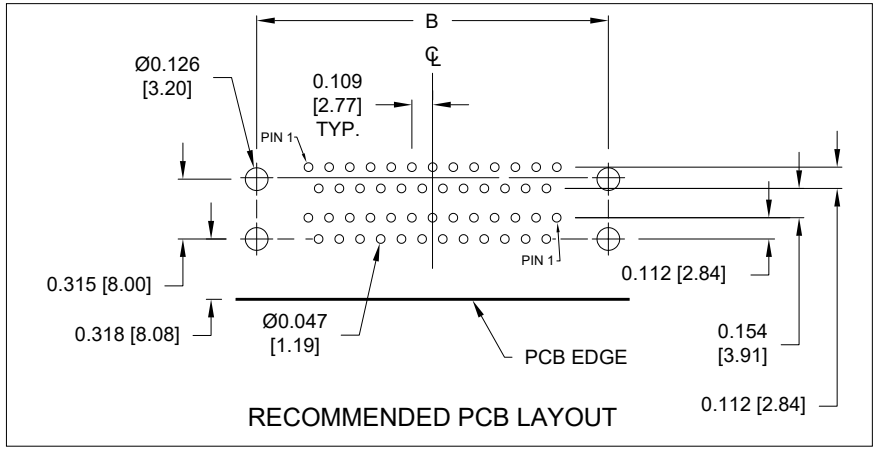


DESCRIPTION: 0.625 CENTER DUAL PORT D-SUB - MALE OVER FEMALE

25 PIN SHOWN

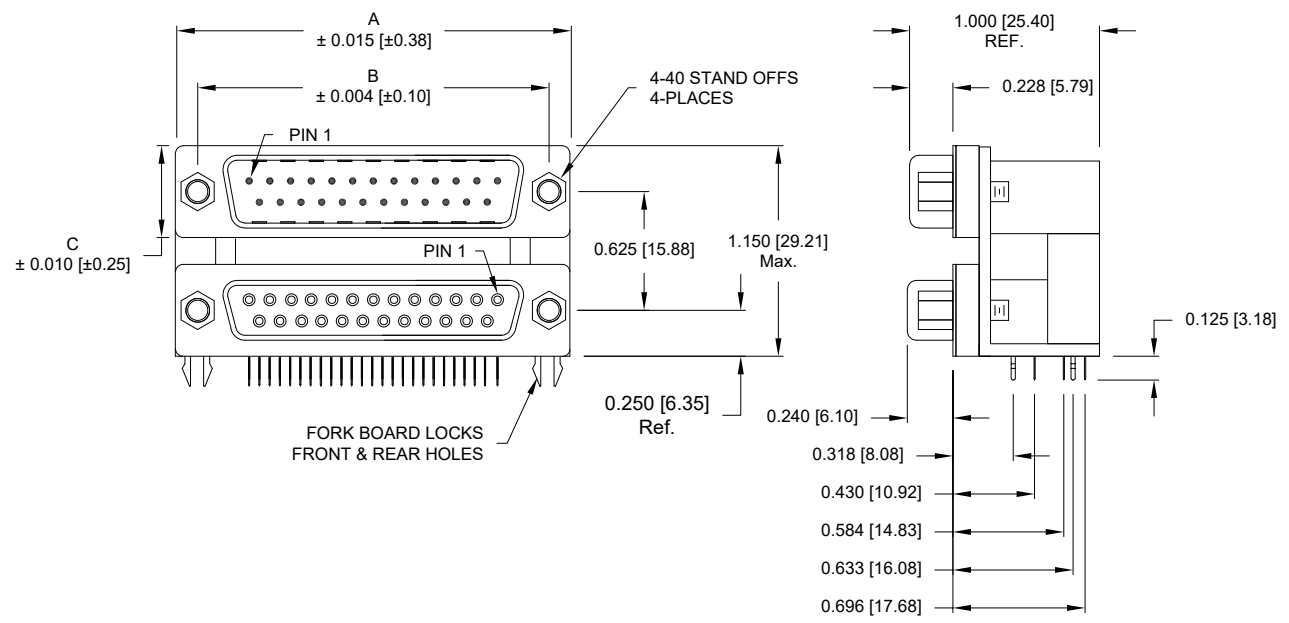

SPECIFICATIONS:

**MATERIALS:**  
 HOUSING: UL94 V-0 RATED, BLACK PA9T, 260° PROCESS TEMP.  
 CONTACTS: GOLD PLATED BRASS (SEE P/N KEY BELOW)  
 SHELL: NICKEL PLATED STEEL

**ELECTRICAL:**  
 RATED CURRENT: 5A  
 INSULATOR RESISTANCE: 1,000 Ohms MIN.  
 DIELECTRIC STRENGTH: 1,000 VAC RMS  
 WORKING VOLTAGE: 250V  
 OPERATING TEMPERATURE: -55°C TO +105°C

**DIMENSIONS:**

	9	15	25	37
A	1.204 [30.58]	1.535 [38.99]	2.078 [52.78]	2.724 [69.19]
B	0.984 [24.99]	1.312 [33.32]	1.850 [46.99]	2.500 [63.50]
C	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]

189-YYY-413R571

SERIES \_\_\_\_\_  
 POSITIONS \_\_\_\_\_  
 009  
 015  
 025  
 037  
 GENDER \_\_\_\_\_  
 31 = FEMALE OVER MALE  
 41 = MALE OVER FEMALE  
 51 = FEMALE OVER FEMALE  
 61 = MALE OVER MALE  
 SHELL PLATING \_\_\_\_\_  
 3 = NICKEL

HARDWARE OPTIONS \_\_\_\_\_  
 57 = 4-40 STAND OFFS/BOARD LOCKS

PLATING OPTIONS \_\_\_\_\_  
 1 = SELECTIVE (GF MATING AREA / TIN PLATED TAILS)  
 A = 30u" GOLD MATING AREA/GOLD FLASH TAILS  
 9 = 30u" GOLD MATING AREA/TIN TAILS

RoHS COMPLIANT

UNITS = inch [mm] DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH  
 DATE: 03/30/07

NorComp

SCALE: NTS SHEET 1 OF 1 REV 7  
 DWG NO. 189-YYY-413R571